



LOW ROOF FOR 2004+ PETERBILT 379

Item Number: 28008


	PART #	COMPONENTS	QTY
Α		Driver Visor	1
В		Passenger Visor	1
С		Driver Bracket	1
D		Passenger Bracket	1
Ε		Center Bracket	1
F	28008-1	Truss HD. Screw ¼NC x ¾"	12
G	28008-2	Flat Washer ¼	34
н	28008-4	Hex. Nut ¼NC	12
I	28008-5	Hex. Bolt ¼NC x 1 ¼"	8
J	28008-6	Well Nut ¼NC	8




INSTALLATION INSTRUCTION Item Number: 28008


- 1. Remove original factory sun visor and brackets. Attach the left and right visor. Fasten the 2 halves together with the ¼NC x ¾" screw.
- 2. Feed the ¼NC x ¾" screw through the six remaining openings.

3. Attach the 3 supporting brackets to the sun visor. Please take note for each brackets position.

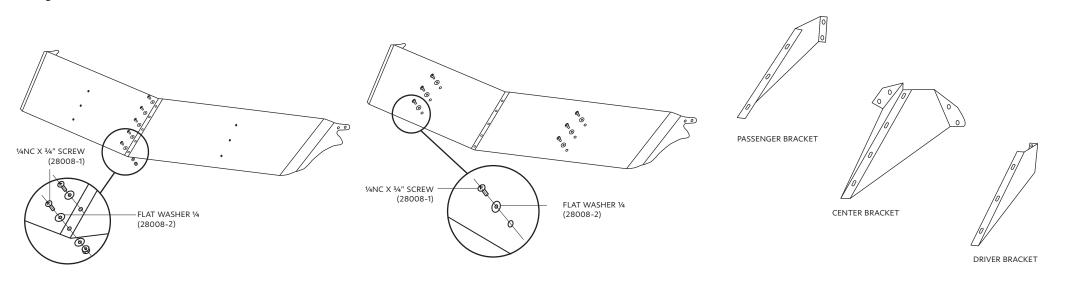

- 4. Fasten each screw to the bracket with a ¼ flat washer and ¼ hex nut on the back side of the bracket.
- 5. Attach the brackets to the cab with the ¼NC x 1¼" hex bolt. Feed the ¼NC x 1¼" hex bolt and a ¼ flat washer through each hole of the bracket. Fasten the hex bolts with the ¼NC well nut on the back.
- 6. Fasten the sides of the sun visor to the cab with original screws. Feed the original screws and ¼ flat washer through each of the 4 holes. Tighten with the original well nuts.

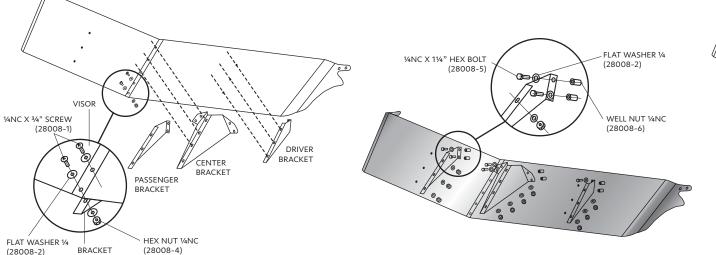



 * Depending on the year of the truck, holes may need to be drilled on the front of the cab for proper installation