
Stainless Steel Accessories


License plate holder installation instructions

11/19/2020

- 1. Loosen countersunk bolts under bumper fairing, allowing enough room to insert license plate holder. (loosen all six bolts for three plateholder)
- 2. Insert License Plate Holder slots into air dam bolts between bumper fairing and air dam.

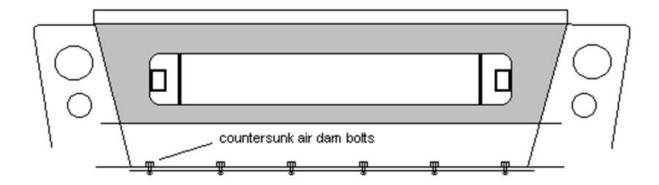

- 3. Slide top bend of license plate holder over lower lip of bumper opening.
- 4. When plate holder is in desired position, and mark drill holes.

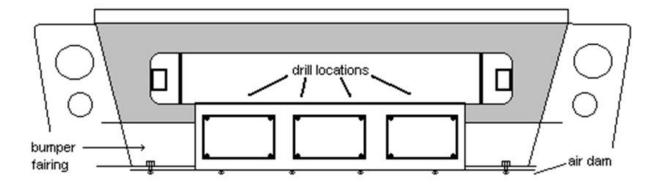

- 5. Drill 7/32" or 3/16" holes through holes in license plate holder into bumper. (if available, use an "Angle Drill")
- 6. Using "shorty" Phillips screwdriver, attach supplied hardware.
- 7. Unclamp top section and tighten air dam bolts.

